
LX5S Series PLC



Functions

- Support to modify frequency and position during pulse control;
- Support the highest baud rate: 921600;
- Support 100us high-speed timer interrupts;
- Support up to 100 high-speed counter interrupts;
- Support E-CAM;
- Support electronic gear;
- Support efficient and stable PID and CCPID self-tuning;
- Support LX3V series modules;
- USB power supply;
- Same software with LX5V;
- 0.03μs~0.08μs for basic instruction execution.

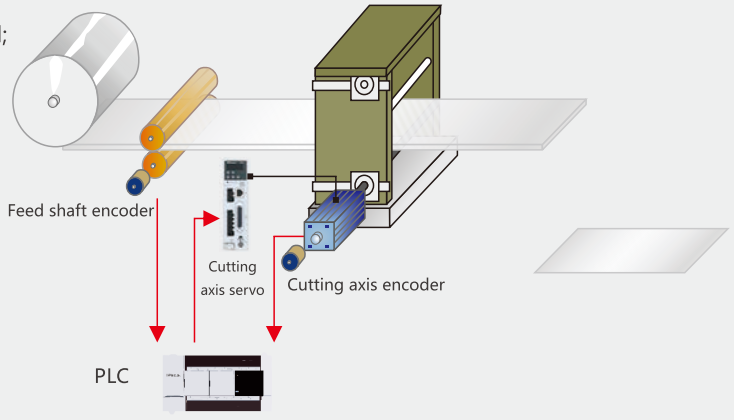

E-cam -- Flying cutting function

More Registers

- 512KB program capacity;
- 76KB latched capacity;
- 76KB register capacity;
- Added 128 timers of 0.1ms;
- Added 128 timers of 1ms.

